

# SCREW-PUMP SERIES – PC6

manufactured in EU

## SPRAYMASTER PC6



### Capable of handling

- water repellent
- filling the fugue between stones
- bitumen sealment
- borehole suspensions
- and a lot more

### Definitive advantages

- small, light, handy
- powerful and reliable
- fast to build apart into 3 parts
- adjustable speed
- power supply 230 V / 50 Hz
- easy handling and cleaning
- safety shutdown

### Unit outfit (PC6)

- basic unit PC6 on trolley
- hopper 30 ltr. with lid
- remote control unit cpl. 5m

### Unit outfit (PC6 SprayPack)

- basic unit PC6 cpl.
- material hose ¾" - 5m
- spray lance cpl.
- with 6,5mm nozzle

### Einsatzbereiche

- Betonspachtel
- Spritzabdichtung
- Dichtschlämme
- Bohrlochsuspension
- Horizontalsperre
- uvm.

### Überzeugende Vorteile

- klein, leicht, handlich
- kraftvoll und zuverlässig
- in 3 Teile zerlegbar
- stufenlos regelbar
- Stromanschluss 230 V / 50 Hz
- Leichte Handhabung und Reinigung
- Sicherheitsabschaltung

### Lieferumfang (PC6)

- Grundgerät PC6 auf Fahrgestell
- Oberbehälter 30 ltr. mit Deckel
- Fernsteuerkabel kmpl. 5m

### Lieferumfang (PC6 SprayPack)

- Grundgerät PC6 kmpl.
- Materialschlauch ¾" - 5m
- Spritzrohr komplett
- mit 6,5mm Düse

**K-330**



## Compressor Compact K330

- Small, high performance, oil free
- Especially suitable for bituminous coatings, plasters and decorative coatings
- Extendable handle, rubber wheels and light weight make transportation simple and uncomplicated

## Technical specifications K330

- max. pressure: 10 bar
- suction: 330 l/min.
- fill capacity: 200 l/min.
- motor rating: 2,05 kW
- tank: 3 l
- weight: 32 kg

## Technical specifications PC6

- weight: 17 kg
- motor rating: 1,2 kW
- material output: max. 0,5 – 6 ltr./min.
- pressure: max. 25 bar
- grain size: max. 2mm
- dimensions: 70x38x65
- CE / made in EU


**SPL-100-LB**



**SPL-100**



**SPL-FUG**

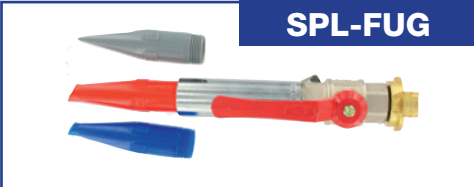

**G-SPL-SET**



**G-PC-6-08**



**MS-3/4-5**



## Kompressor Compact K330

- Klein, leistungsstark, ölfrei
- Besonders geeignet für Bitumen, Putze und dekorative Beschichtungen
- Ausziehbarer Griff, Gummiräder und geringes Gewicht machen den Transport einfach

## Technische Daten K330

- max Druck: 10 bar
- Ansaugleistung: 330 l/min.
- Füllleistung: 200 l/min.
- Motorleistung 2,05 kW
- Behälter: 3 l
- Gewicht: 32 kg

## Technische Daten PC6

- Gewicht: 17 kg
- Motorleistung: 1,2 kW
- Förderleistung: max. 0,5 – 6 ltr./min.
- Betriebsdruck: max. 25 bar
- Korngrösse: max. 2mm
- Abmessungen: 70x38x65
- CE / made in EU

**Distributor and Service / Ihr Fach- und Servicepartner:**